

Flex Fuel Composition Sensor - Suit 3/8 "GM Spring Lock" fittings (inc plug & pins)


Used to measure Ethanol content



HARNESS SIDE VIEW

Termination	
VCC	Power (+12V)
GND	Ground (Signal Ground)
OUT	Signal Out (To ECU)

This sensor output must be wired to a Digital input (SPI or DPI)

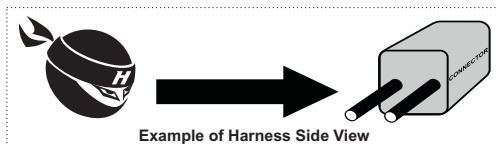

Use Haltech Calibration file:

FuelCompositionSensor - Digital Haltech.cal

Calibration		
Hz	50	150
%	0	100


Please take care when wiring this sensor as incorrect wiring will damage this sensor!

Do **NOT** reverse the polarity of active sensors as sensor damage will occur.




VIDEO: How To Crimp Like A Pro

<http://bit.ly/haltechcrimp>



Use Crimper set HT-070300 to crimp the pins in this package



(1) Crimp Pin to wire and then
(2) insert into harness side of Plug

HT-011000

Revision #2

Haltech
ENGINE MANAGEMENT SYSTEMS

Need more help?



Intl: +61 2 9729 0999
USA: +1 888 298 8116



Intl: support@haltech.com
USA: usasupport@haltech.com



www.haltech.com



/Haltechecu



/HaltechEngineManagement