



PATCH HARNESS (HT041410)

SUPPORTED MODELS

NISSAN SKYLINE R32 (RB20DET, RB25DET, RB26DETT)
 NISSAN SKYLINE R33 (RB25DET, RB26DETT)
 NISSAN 300ZX / FAIRLADY Z Z32 (VG30DETT)

APPLICATION NOTES:

PATCH LOOM IS ONLY TO BE USED WITH AN PS2000 ON THE VEHICLES STATED ABOVE.
 THE PS2000 DOES NOT COME PRELOADED FROM HALTECH AND THE CORRESPONDING
 BASE MAP MUST BE LOADED. PLEASE SEE TABLE BELOW FOR APPROPRIATE BASEMAP.

THE BASE MAP IS ONLY TO BE USED AS A STARTING POINT, THE ECU WILL REQUIRE TUNING.

HALTECH WILL NOT BE HELD RESPONSIBLE FOR ENGINE DAMAGE DUE TO DRIVING ON BASEMAPS.

ALL MODELS WILL REQUIRE A HALTECH EXTERNAL MAP SENSOR TO BE FITTED.
 ALL BASEMAPS HAVE BEEN SETUP FOR A HALTECH 3 BAR MAP SENSOR UNLESS STATED.
 ALL MODELS (EXCEPT GTR) WILL REQUIRE A HALTECH AIR TEMP SENSOR TO BE FITTED.

PLEASE REFER TO PS2000 MANUAL FOR FURTHER INFORMATION

HALTECH BASE MAPS

MAKE	MODEL	CODE	ENGINE	BASEMAP
NISSAN	SKYLINE	R32	RB20DET	Nissan Skyline R33 GTST.hs2-106
NISSAN	SKYLINE	R32	RB25DET	Nissan Skyline R33 GTST.hs2-106
NISSAN	SKYLINE	R32	RB26DETT	Nissan Skyline R32 GTR.hs2-106
NISSAN	SKYLINE	R33	RB25DET	Nissan Skyline R33 GTST.hs2-106
NISSAN	SKYLINE	R33	RB26DETT	Nissan Skyline R32 GTR.hs2-106
NISSAN	300ZX/FAIRLADY Z	Z32	VG30DETT	Nissan Skyline R33 GTST.hs2-106

HALTECH INPUTS/OUTPUTS

INPUT/OUTPUT	PS2000 CONNECTOR	PIN	FUNCTION
DPO 1	34	18	TACHO
DPO 2	34	1	IDLE CONTROL MOTOR (BAC)
DPO 3	34	23	WASTEGATE SOLENOID
DPO 4	26	19	VARIABLE CAM SOLENOID
DPO 17	34	30	NOT USED
DPO 18	34	29	A/C CONTROL
DSI 1	26	7	A/C REQUEST
DPI 1	26	8	ROADSPEED
DPI 2	26	9	NOT USED
DPI 3	26	10	NOT USED

HT041410 - PS2000 PATCH LOOM

HALTECH, SYDNEY AUSTRALIA

DATE: 18TH MARCH 2010


(REV C)

SHEET 1 OF 2

AUXILLARY CONNECTORS

PS2K ECU CONNECTOR

CONN PIN

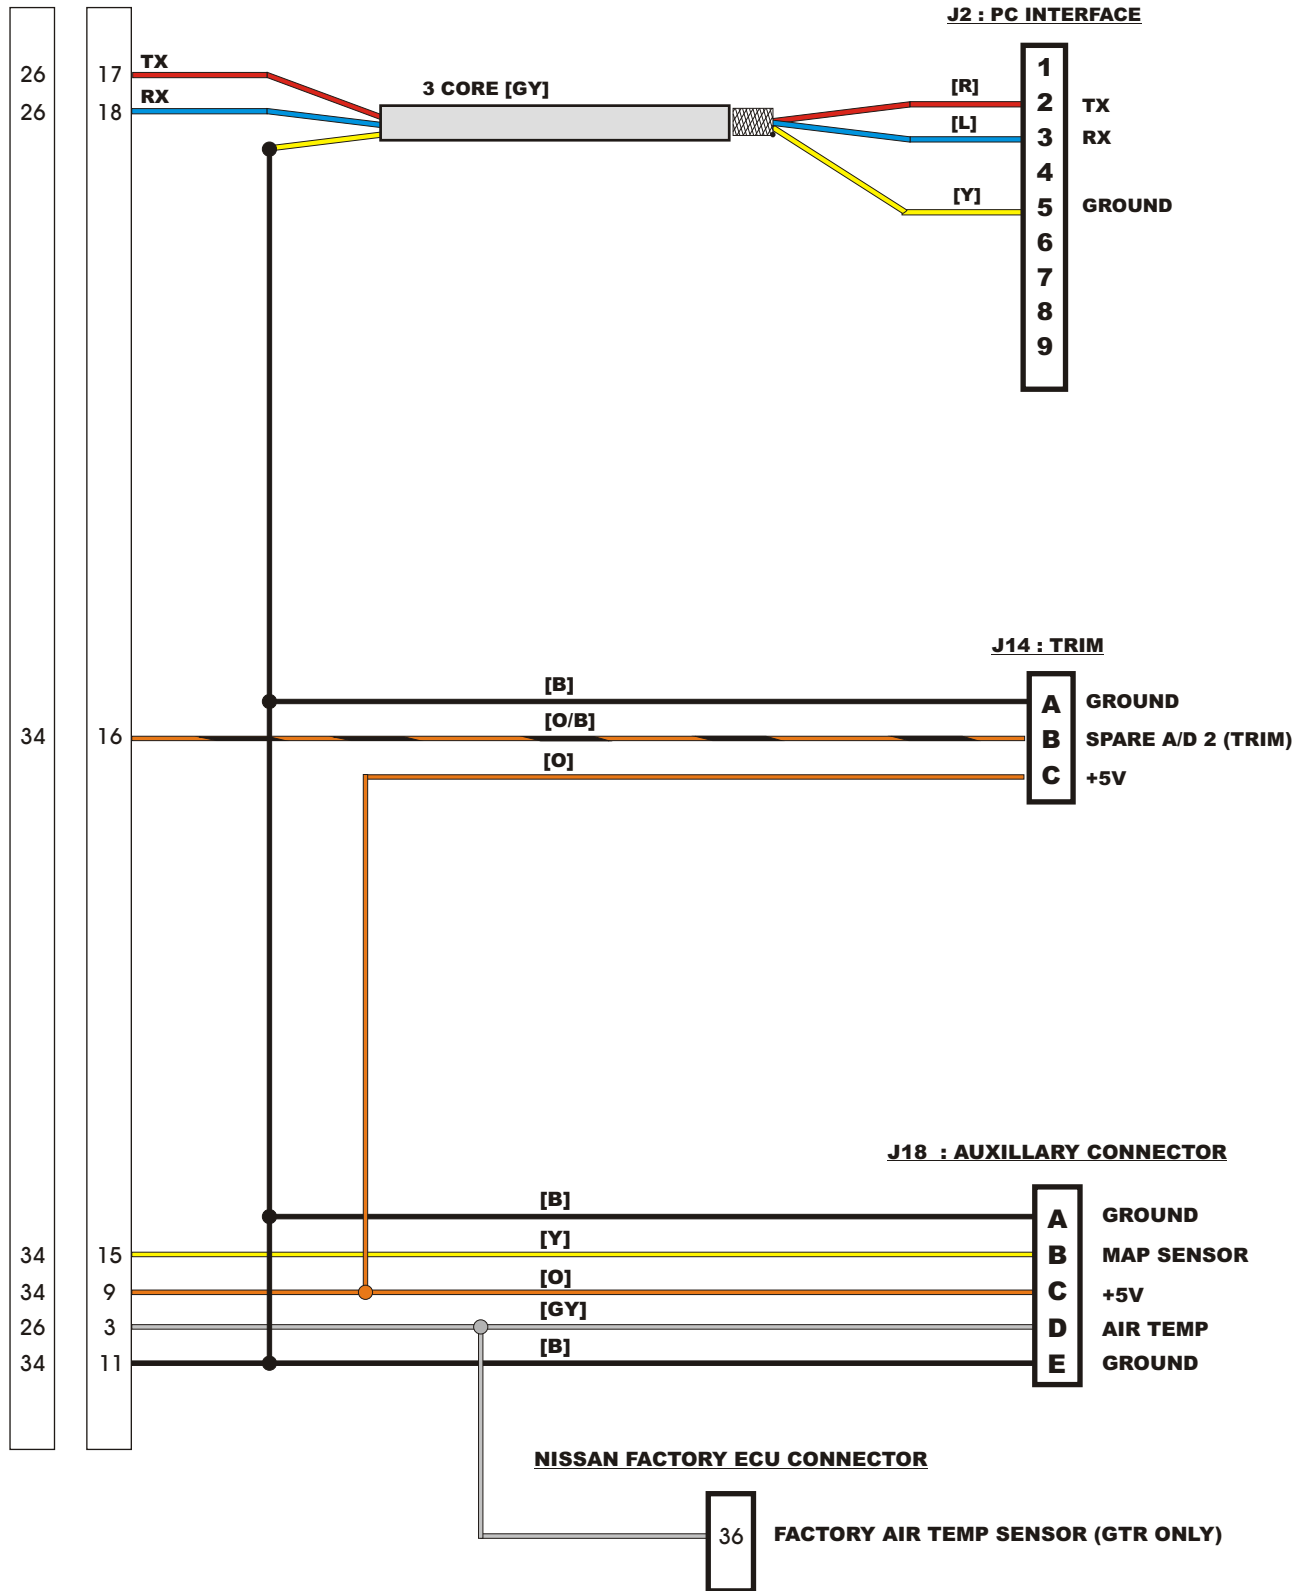

HT041410 - PS2000 PATCH LOOM

HALTECH, SYDNEY AUSTRALIA

DATE: 18TH MARCH 2010

(REV C)

SHEET 2 OF 2